

waterpik

# Instruction Manual Manuel d'instructions Manual de instrucciones

**Model # is located by barcode.**  
Please write your model # on your sales receipt or below.

**Le numéro de modèle se trouve à côté du code-barres.**  
Veuillez inscrire le numéro de modèle sur votre reçu de vente ou ci-dessous.



**El número de modelo está ubicado al lado del código de barras.**  
Sirvase escribir el número de modelo en el recibo de compra o debajo.

Model Number:

[www.waterpik.com/shower-register](http://www.waterpik.com/shower-register)

FN 20016906-F-AL

## INSTALLATION

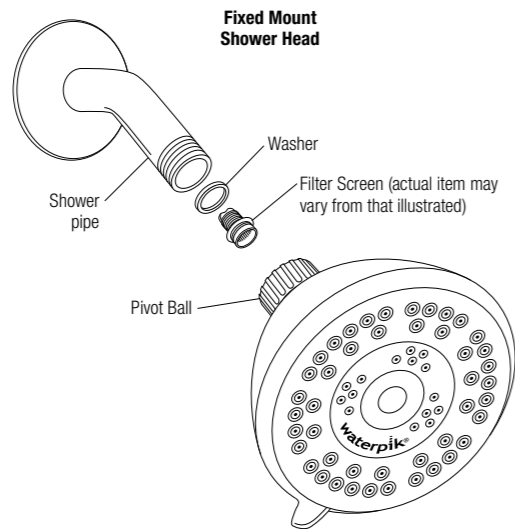

1. Install fixed mount shower head by holding the shower head in position and threading the pivot ball onto the shower pipe and **hand tighten** by turning clockwise until it is snug.

## ENGLISH


Thank you for purchasing this Waterpik® shower head. This booklet provides information to make installation easy and quick. You are close to enjoying a powerful and invigorating shower experience with your new Waterpik® shower head.

You can view more information about Waterpik® shower head products at [www.waterpik.com](http://www.waterpik.com). To learn more about Waterpik® water for wellness® benefits go to [www.waterpikwellness.com](http://www.waterpikwellness.com).

**Note:** Pictures shown may not directly match your shower head.


## TOOLS YOU MAY NEED

- Tools may be needed for removal of old shower head or tightening new shower head.



## OPERATION

**Spray Selector (On Some Models):**  
Spray Selector allows you to select from various spray patterns. On some models spray pattern is controlled by the small lever that rotates left and right.




## SPECIAL FEATURES

**Toggle Button (On Some Models):**  
Spray patterns for AST/ASO models are controlled by a push button which allows you to select either the full-body spray or the concentrated power spray. To change the setting, push the button at the base of the shower head so that it extends to the opposite side of its current position.

**AST Models:** Change the orientation of your shower head by loosening the nut and repositioning shower head; retighten. Allows for higher, lower or wider spray coverage.

**Water Saving Trickle Button (On Some Models):**  
To use the button simply push the toggle button on the back of the shower head. To return to original setting, push button on other side of the shower head.



## WARNING:

- 1 To avoid hot water dangers and conserve even more energy, make sure your water heater is set at 120°F (48.9°C) or below.
- 2 Test the tub/shower water with your hand before bathing.
- 3 For additional safety for Ecoflow® or high efficiency shower heads, it is recommended that all homes have installed a pressure balance tub and shower valve with the rotational limit stops properly set by a plumber.
- 4 **For external use only.** The potentially deadly amoeba, *Naegleria fowleri*, may be present in some tap water or unchlorinated well water.

## CARE AND CLEANING

- To maintain proper working conditions cleaning is required when mineral deposits appear on the spray orifices. To clean mineral deposits, gently rub the rubber nozzles on the face of the shower head to dislodge.
- To clean heavier deposits, remove shower head and soak face down in 1-2 cups of white vinegar (use white vinegar only) for about 2-3 hours. Replace shower head and run in each mode to flush out vinegar. Repeat as necessary.

- **Do not clean or rinse any part with harsh chemicals, heavy duty cleaners, or abrasives; this may damage parts or finish and will void warranty.**
- Clean filter screen by removing from the pivot ball and rinse by back flushing to remove particles. Follow step 1 under installation to reinstall shower head, making sure washer is re-seated on top of filter screen.

## TROUBLESHOOTING GUIDE

Problem	Solution
No water flow from installed shower head.	a Confirm previous shower washer is not in the shower pipe. b Confirm there is only one washer in the pivot ball.
Low water pressure or missing spray patterns.	a Clean shower head in vinegar/water solution. (See care & cleaning section). b Clean filter screen.
Leaking at pipe pivot ball connection.	a Confirm only one washer is seated on top of the screen. b Grate bar of soap across the shower pipe threads to act as a sealant. c Make sure all pipe tape is removed from shower pipe. Please refer back to installation instructions for pipe tape.

Shower head is too stiff to change angle.	a Install shower head to provide additional leverage to change angle of spray (contact Water Pik for further instructions). See Toggle Button spray pattern instructions.
---	---

## LIFETIME LIMITED WARRANTY

**Save your receipt as proof of purchase is required for warranty action.** Water Pik, Inc. warrants to the original purchaser of this product that it is free from defects in material and workmanship for as long as the original purchaser owns this product. Water Pik, Inc. will replace the product which in our opinion is defective, provided that the product has not been abused, misused, altered or damaged after purchase. (This includes damage due to use of tools or harsh chemicals.) In the event an item has been discontinued we will replace with what we deem to be the closest product. Water Pik, Inc. is not responsible for labor charges, installation, or other consequential cost. The responsibility of Water Pik, Inc. shall not exceed the original purchase price of the product. This warranty gives you specific legal rights. You may also have other rights that vary where you reside.

Water Pik disclaims all other express or implied warranties to the extent permitted by law including, but not limited to, all warranties of merchantability and fitness for a particular purpose. All implied warranties are limited to the duration of this limited warranty. Some states or

provinces may not allow limitation on how long an implied warranty lasts, so above may not apply to you.

**Limitation of Liability:** This limited warranty is your sole remedy against Water Pik and it shall not be liable for any damages, whether direct, indirect, incidental, special, consequential, exemplary or otherwise, including but not limited to property damage, arising out of any theory of recovery, including statutory, contract or tort.

## BINDING ARBITRATION AND WAIVER OF RIGHT TO ASSERT MATTERS IN COURT AND RIGHT TO JURY TRIAL

By purchasing, installing, or using this product you agree that any controversy or claim arising out of or relating to your purchase, use, modification, installation, or removal of this product shall be settled by binding arbitration. The arbitrator's decision will be final and binding. Judgment on the award rendered by the arbitrator may be entered in any court having jurisdiction over the matter. Further, you agree that you will not have the right to litigate any claim arising out of or in relation to your purchase, use, modification, installation, or removal of this product in any court or to have a jury trial on that claim.

Arbitration of any matters shall be administered by the American arbitration association and conducted by one arbitrator in accordance with the consumer arbitration rules of the American Arbitration Association in effect at the time of filing of the demand. The venue for all such arbitrations shall be Colorado and any such arbitration shall be subject to the Federal Arbitration Act and Colorado law.

## WAIVER OF RIGHT TO PARTICIPATE IN CLASS ACTIONS OR PURSUE CLAIMS IN A REPRESENTATIVE CAPACITY.

Further, by purchasing, installing, or using this product you agree that arbitration must be on an individual basis. This means neither you, nor we, may join or consolidate claims in arbitration by or against other purchasers or users of Water Pik products or the general public. Additionally, you may not litigate in court or arbitrate any claims as a representative or member of a class or in a purported representative capacity on behalf of the general public, other purchasers or users of this product, other persons or entities similarly situated, or in a private attorney general capacity.

**If product malfunctions or becomes damaged, stop use and contact Water Pik, Inc. for assistance.**

## Have any questions or need assistance?

For quick service prior to calling have your model number and receipt ready.

In the U.S., call our toll-free Customer Assistance Line **1-800-525-2774**, Monday – Friday, 7:00 AM – 5:00 PM MST. English only. or visit [www.waterpik.com](http://www.waterpik.com)

In Canada, call our bilingual toll-free Customer Assistance Line **1-888-226-3042**, Monday – Friday, 7:00 AM – 5:00 PM MST. or visit [www.waterpik.ca](http://www.waterpik.ca)

© 2020 Water Pik, Inc. Printed in China.

waterpik

Water Pik, Inc., a subsidiary of Church & Dwight Co., Inc.  
1730 East Prospect Road  
Fort Collins, CO 80553-0001 U.S.A.  
[www.waterpik.com](http://www.waterpik.com)

## FRANÇAIS


Nous vous remercions pour votre acquisition de ce produit de doucheage Waterpik®. Ce livret fournit des instructions pour une installation rapide et facile. Vous pourrez dans peu de temps bénéficier de la puissance et des effets rafraichissants de votre nouveau produit de doucheage Waterpik®.

D'autres informations sur les douchettes Waterpik® sont disponibles sur le site [www.waterpik.com](http://www.waterpik.com). Pour en savoir plus sur les bienfaits water for wellness® de Waterpik®, visitez le site Web [www.waterpikwellness.com](http://www.waterpikwellness.com).


**Note :** Les illustrations incluses peuvent ne pas représenter exactement le produit acheté (douchette).

## OUTILLAGE POUVANT ÊTRE NÉCESSAIRE

- Des outils peuvent être nécessaires pour ôter l'ancienne douchette ou serrer la nouvelle.





## AVANT L'INSTALLATION



- Retirez l'ancienne douchette et enlevez l'adhésif à tuyauteries.
- Veiller à ce que le joint de la douchette existante ne reste pas attaché sur le tube d'alimentation. Utiliser un ustensile mince tel un crayon ou un tournevis pour vérifier qu'aucun joint ne se trouve à l'intérieur du tube d'alimentation. **Ne pas utiliser les doigts.**
- Aucun outil n'est nécessaire pour l'installation de la douchette.

## INSTALLATION

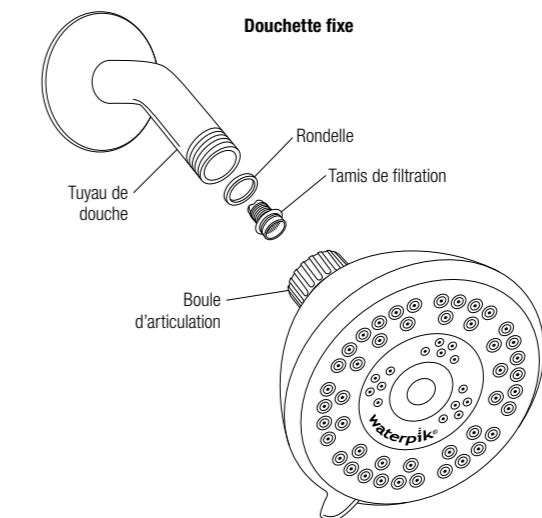


1. Installez la douchette fixe en maintenant la douchette en position, puis en vissant la boule d'articulation sur le tuyau de douche; serrez à la main en tournant dans le sens horaire jusqu'à ce qu'il soit bien serré.

## UTILISATION DU PRODUIT

### Sélecteur du mode d'aspersion (sur certains modèles) :


Le sélecteur du mode d'aspersion permet de choisir l'un des modes d'aspersion disponibles sur la douchette. Le pivotement d'une petite manette (vers la droite ou vers la gauche) permet la sélection du mode d'aspersion.




## CARACTÉRISTIQUES SPÉCIALES

### Bouton de changement d'aspersion (sur certains modèles) :

Sur les modèles AST/ASO, le mode d'aspersion est contrôlé par un bouton-poussoir qui vous permet de sélectionner soit l'aspersion corps entier, soit l'aspersion haute puissance concentrée. Pour modifier le réglage, appuyer sur le bouton situé à la base de la douchette de manière à ce qu'il dépasse de l'autre côté de sa position actuelle.



**Modèles AST :** Modifier l'orientation de la douchette en desserrant l'écrou puis en repositionnant la douchette. Reserrer ensuite. Permet une aspersion plus haute, plus basse ou plus large.



### Bouton de Ruissellement éconergique (sur certains modèles) :

Pour utiliser le bouton, il suffit d'appuyer sur le bouton de changement d'aspersion situé à l'arrière de la douchette. Pour revenir au mode d'aspersion d'origine, appuyer sur le bouton situé de l'autre côté de la douchette.



## AVERTISSEMENT :

1. Afin d'éviter les dangers liés à une eau à forte température et de conserver davantage d'énergie, vérifier que le chauffe-eau est réglé à un maximum de 120°F (48,9°C).
2. Tester la température de l'eau de la baignoire/douche avec la main avant de se baigner.
3. Pour plus de sécurité avec les douchettes Ecoflow® ou douchettes haute efficacité, on recommande l'installation dans chaque résidence d'un mitigeur à équilibrage des pressions (pour baignoire/douche), avec butées de limitation de la rotation adéquatement réglées par un plombier.
4. **À usage externe uniquement.** L'amibe *Naegleria fowleri* potentiellement mortelle peut être présente dans certaines eaux du robinet ou eaux de puits non chlorées.

